

The INFORCE 6vx 200-lumen lighting system features a new multifunction tailcap switch which provides constant, momentary, high, low, strobe and lockout modes. In addition, this new switch offers the ability to disable the strobe feature and reverse the sequence of high/low setting to low/high at the first press of the button. The fiber composite body is lightweight and durable. A patented venting system keeps the light cool, even with prolonged use. O-rings seal out water, dust and dirt to protect it under extreme conditions.

Designed and engineered specifically for military and law enforcement use with the finest materials and precision manufacturing techniques. Every engineered aspect, whether in optics, electronics, materials, thermal dissipation, power management, durability or usability has been driven by performance criteria.



200

LUMENS

RUN TIME: 2h

LOW POWER SETTING

40 Lumens

RUN TIME: 10h

NEW MULTI-FUNCTION TAILCAP SWITCH:

- Constant, Momentary, High, Low, Strobe and Lockout
- Reversible High/Low to Low/High Capability
- Strobe Disable Option

Bezel Diameter: 1 in. / 2.54 cm.

Length: 4.85 in. / 12.466 cm.

Weight: 3.3 oz. / 93.5 g.

(2) Lithium 123A Batteries Included

Features and Benefits:

FIBER COMPOSITE BODY is ultralight and durable.

SINGLE-HAND OPERATION simple, reliable, intuitive tailcap switch operates programs and modes.

BELT CLIP W/BUILT-IN LANYARD HOLE accepts 550 cord.

SCALLOPED HEAD designed to let the light “spill out” to indicate that the light is on while in an upright position.

PATENTED HEAT RELEASING VENTS maximize LED performance and keep the light cool to hold.

HIGH EFFICIENCY EMITTERS provide longer run times and are virtually immune to failure.

PRECISION OPTICS provide focused hot spot and balanced peripheral light.

HIGH-IMPACT GLASS WINDOW

MIL-STD-810F Certified

LIMITED LIFETIME WARRANTY

CAUTION: Do not use counterfeit or inferior-quality batteries, as they do not meet safety and performance standards and have been the cause of personal and property damage. To ensure safety and performance, the purchase of established brands, such as Duracell®, Energizer® or Panasonic® is recommended.

ITEM NUMBER	BODY COLOR	LED
INF-6VX-B-W	Black	White
INF-6VX-S-W	Desert Sand	White

©2011 EMISSIVE ENERGY Corp. An ISO9001:2008 Certified Company.

135 Circuit Drive, North Kingstown, RI 02852; Tel: 401-294-2030; Fax: 401-294-2050; www.inforce-mil.com


INFORCE and EMISSIVE ENERGY are registered trademarks of Emissive Energy Corp. 6vx and the distinctive shapes, styles, packaging configurations and overall appearances of INFORCE lighting systems are trademarks of Emissive Energy Corp. Designed and manufactured under one or more of the following U.S. and International patents: U.S.: 6,966,677; 7,121,680; 7,153,004; 7,226,183; 7,517,108; 7,652,303; 7,784,963; D526,730; D565,220; D579,201; D596,329; D619,283. European: 467295-0001; 467295-0002. Other U.S. and International patents are pending.

Designed and assembled in the U.S.A. of domestic and foreign components. INFORCE products qualify as “American Made” under the Buy America Act.

PM1046/111806

6vx™ and 9vx™ FLASHLIGHT USER MANUAL AND WARRANTY

INFORCE®

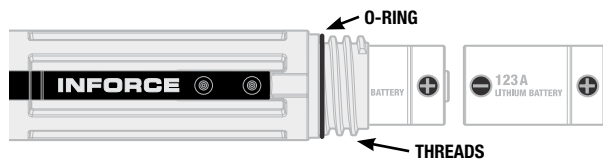

BATTERY REPLACEMENT

Your INFORCE 6vx flashlight comes with (2) high-efficiency 123A Lithium batteries; the INFORCE 9vx with (3).

To insert the batteries, turn the multi-function tailcap counterclockwise to remove it from the flashlight body. Insert the batteries into the open handle, negative (-) end first.

Re-thread the multi-function tailcap clockwise onto the flashlight handle.

Notes:

- When replacing batteries, never mix battery type or old and new batteries.
- Batteries can leak and may cause damage to the inside of the light. Remove the batteries if the flashlight will be stored for more than 2 weeks.
- Flashlight heads are non-removable; any attempt to remove the head will damage the light and void the warranty.
- The light output of the flashlight will dim over time as your batteries start to drain. At some point, batteries that have been depleted substantially will not have enough energy to sustain a full high power output. At that time, there will be little to no distinction when attempting to cycle between high and low modes. However, there will still be enough energy in the batteries to produce useful light for a period of time. This is not an indication that the batteries have to be changed.

CAUTION: Lithium batteries can explode or cause burns if recharged, shorted, disassembled or exposed to water, high temperatures or fire. Please follow manufacturer's guidelines for safe storage, use and disposal. If the light has been submerged, dry the exterior of the light prior to replacing the batteries. Fresh and salt water will damage internal electronics and batteries. **Do not use counterfeit or inferior-quality batteries, as they do not meet safety standards and have been the cause of personal and property damage. To ensure safety and performance, the purchase of established brands, such as Duracell®, Energizer® or Panasonic® is recommended.**

PRODUCT WARRANTY

Emissive Energy Corp. (EEC) warrants our products and accessories to be free of defect in workmanship and materials for the lifetime of the original owner. We will repair or replace the product, at our discretion, if it is determined by us to be defective. In countries or jurisdictions in which specific restrictions exist on lifetime warranties, EEC provides a 10-year limited warranty. Damage to the product from misuse, abuse, neglect, use of other than INFORCE brand accessories, disassembly, defective batteries or altering the product from its original state voids the warranty. Battery power depletion and battery expiration is not covered. This warranty is in addition to and does not affect your statutory rights with respect to faulty goods.

THIS CONSTITUTES EEC'S ENTIRE WARRANTY; WE MAKE NO OTHER WARRANTIES, WHETHER EXPRESS OR IMPLIED, WITH RESPECT TO THE PRODUCTS, INCLUDING AND WITHOUT LIMITATION TO WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. EXCEPT FOR THE EXPRESS WARRANTY TO REPAIR OR REPLACE THE PRODUCT AS SET FORTH ABOVE, EEC IS NOT RESPONSIBLE FOR ANY DIRECT, SPECIAL, INCIDENTAL, CONSEQUENTIAL, EXEMPLARY OR INDIRECT COSTS OR DAMAGES, REGARDLESS OF THE FORM OF ACTION, WHETHER IN CONTRACT, TORT (INCLUDING NEGLIGENCE), STRICT LIABILITY OR OTHERWISE, EVEN IF EEC HAS BEEN ADVISED OF THE POSSIBILITY THEREOF, NOR IS EEC LIABLE FOR ANY SUCH COSTS OR DAMAGES CAUSED BY MISUSE, NEGLIGENCE, MALFUNCTION, ALTERATION OR MODIFICATION OF ANY INFORCE PRODUCTS. BECAUSE SOME STATES DO NOT ALLOW THE EXCLUSION OR LIMITATION OF LIABILITY FOR CONSEQUENTIAL OR INCIDENTAL DAMAGES, IN SUCH STATES EEC'S LIABILITY IS LIMITED TO THE FULL EXTENT PERMITTED BY LAW.

©2011 Emissive Energy Corp.

Emissive Energy Corp., 135 Circuit Drive, North Kingstown, RI 02852 USA; Tel: 401-294-2030; Fax: 401-294-2050; www.inforce-mil.com

INFORCE and EMISSIVE ENERGY are registered trademarks and 6vx and 9vx are trademarks of EMISSIVE ENERGY CORP. The distinctive shapes, styles, packaging configurations and overall appearances of all INFORCE flashlights and lighting products are trademarks of EMISSIVE ENERGY CORP. Designed and manufactured under one or more of the following U.S. and International patents: U.S.: 6,966,677; 7,121,680; 7,153,004; 7,226,183; 7,517,108; 7,652,303; 7,784,963; D526,730; D565,220; D579,201; D596,329; D619,283. European: 467295-0001; 467295-0002. **Other U.S. and International patents are pending.**

Designed and assembled in the U.S.A. of domestic and foreign components. This product qualifies as "American Made" under the Buy America Act.

NEW PATENT PENDING MULTI-FUNCTION SWITCH

4-FUNCTION SWITCH OPERATION

- For **momentary** on mode, press and hold the button for more than 1/2 second; when the button is released, the light will turn off.
- For **high power** mode, press the button once. If high power is on for more than 2 seconds, the next press of the button will turn the light off.
- For **low power** mode, press the button twice within two seconds.
- For **strobe** mode, two quick clicks of the button when in **high power**, **low power** or **off** mode will activate the **strobe**.
- For **lockout mode**, twist flashlight tailcap one half turn (180 degrees) counterclockwise.

TO DISABLE THE WHITE STROBE FUNCTION

1. Unscrew the tailcap one half revolution to the lockout position.
2. Press and hold the button.
3. While holding the button, tighten the tailcap and then release the button.
4. To reactivate the strobe function, repeat steps 1, 2 and 3.

TO REVERSE THE WHITE LIGHT POWER SEQUENCE

The white light feature has been set to high/low power sequence as a default. To reverse the order to low/high sequence:

1. Press the button twice to activate the low power setting.
2. Press and hold down the button for approximately 5 seconds. The light will turn off and then blink three times; the default will change from high/low to low/high sequence. Release the button.
3. To return the setting to high/low power sequence, return to the low power setting and repeat step #2.

MAINTENANCE /CLEANING INSTRUCTIONS

Your INFORCE flashlight has been designed to provide maximum performance with minimum maintenance. Occasionally clean threads with a clean cloth and apply a thin coat of silicon-based lubricant to the rubber O-ring; see above illustration. Do not use a petroleum-based lubricant. Should the flashlight become dirty from dust, sand or caked-on mud, rinse fully assembled light with water and dry with a soft cloth.